

ELF Gaussmeter: IDR-210




- Unique product
- Frequency indicator for each channel
- Isotropic sensor / switchable to single axis mode
- Portable and easy to use
- 9V Alkaline Battery included
- True RMS measurement with peak hold
- Analog Output for X, Y & Z Axis waveform
- Two years parts & labor warranty
- 16 character × 2 line display
- Optional 9V DC adaptor provided
- 3 % error guarantee
- Frequency Response (BW): 20-4000 Hz
- Auto or manual ranging with auditory alarm
- Data logging with storage for 32,000 data points
- Record data of all channels w/ RS-232 communication port
- Made in the U.S.A
- Resolution @ Scales: 200 mG: 0.2 mG, 2000 mG: 2 mG

Typical applications:

- ❖ Computer monitors, television sets & electronic equipments
- ❖ AC Power lines
- ❖ Induction heaters, industrial, scientific & medical equipments
- ❖ Household appliances & all types of electrical equipments


Specifications:

Range settings: 200, 2000 milligauss
Bandwidth: 20-4000 Hz
Case Material: High Impact Styrene
Dimensions: 7"×4"×3"
Power Consumption: 400mW
Weight: 1 lb (453.6 grams)
Sensor Probe: Three Axis X, Y, Z air coil



Integrity Design & Research Corporation Electromagnetic Measurement

IDR-210: ELF Gaussmeter w/Probe
IDR-211: Isotropic Replacement Probe
IDR-125: Hard Case
IDR-203: (12, 5, -12) V DC Adaptor

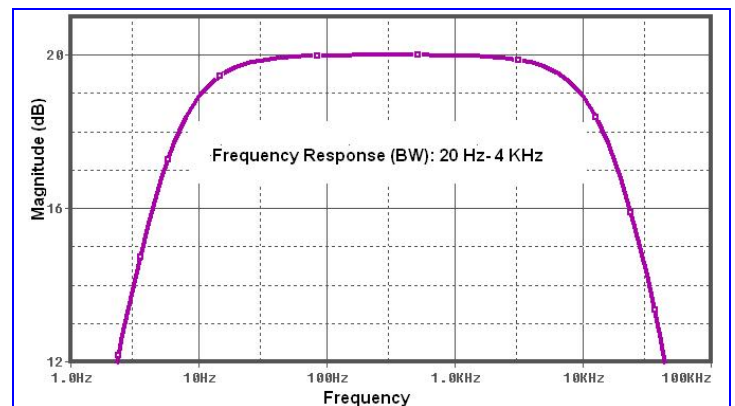

182 Browns River Rd
Essex Jct., VT 05452
Telephone: (802) 872-7116
Toll free: (800) 719-2315
Fax: (802) 872-7115

<http://www.gaussmeter.info>

<http://www.integritydesign.com>